

モールステーパホルダ A型

MORSE TAPER HOLDER (Type A)

BT/BBT (No.) -MTA (No.) - (L)

▶ BBT対応 BBT Available



FIG.1


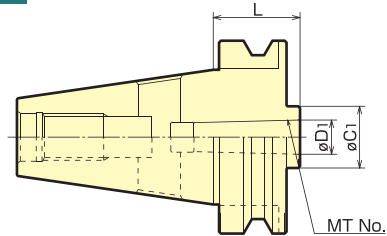


FIG.2

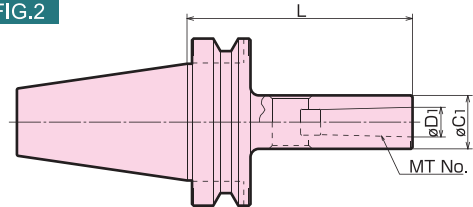

ドリルシャंकと刃径 DRILL DIA. AND SHANK

SHANK		MT1	MT2	MT3	MT4	MT5
ドリル径 DRILL DIA.	以上MIN.	2.0	14.1	23.1	32.1	50.1
	以下MAX.	14.0	23.0	32.0	50.0	75.0

MODEL		CODE		FIG.	MT No.	L	øD1	øC1	N/W (kg)
		BT	BBT						
BT30 BBT30	-MTA1-045	(△)	(△)	1	1	45	12.065	25	0.43
	-MTA2-060	(△)	(△)	1	2	60	17.780	32	0.50
	-MTA3-080	(△)	(△)	1	3	80	23.825	40	0.69
BT40 BBT40	-MTA1-045	(△)	(△)	1	1	45	12.065	25	1.0
	-MTA1-120	11154	240351	2	1	120	12.065	25	1.3
	-MTA2-045	11156	240352	1	2	45	17.780	32	1.0
	-120	11158	240353	2	2	120	17.780	32	1.5
	-MTA3-075	11160	240354	1	3	75	23.825	40	1.2
	-135	11162	240355	2	3	135	23.825	40	1.8
	-MTA4-090	11164	240356	1	4	90	31.267	50	1.4
	-165	(△)	(△)	2	4	165	31.267	50	2.5
BT50 BBT50	-MTA1-045	13302	270365	1	1	45	12.065	25	3.6
	-120	13304	270366	2	1	120	12.065	25	3.9
	-180	13306	270367		1	180	12.065	25	4.2
	-MTA2-045	13308	270368	1	2	45	17.780	32	3.6
	-135	13310	270369	2	2	135	17.780	32	4.2
	-180	13312	270370		2	180	17.780	32	4.5
	-MTA3-045	13314	270371	1	3	45	23.825	40	3.5
	-150	13316	270372	2	3	150	23.825	40	4.5
	-180	13318	270373		3	180	23.825	40	4.8
	-MTA4-075	13320	270374	1	4	75	31.267	50	3.6
	-180	13322	270375	2	4	180	31.267	50	5.2
	-MTA5-105	13324	270376	1	5	105	44.399	65	3.9

注：1. タング付MTシャंक刃具をご使用下さい。

2. BBTは受注生産品です。

3. (△) 表記製品は特殊対応品となります。

NOTE: 1. For tongue type Morse taper shank cutting tools.

2. BBT shank type is made-to-order.

3. CODE (△) The listed products are made to order products.

ご注文例 ORDERING EXAMPLE

①	BT30	-	②	MTA	③	1	-	④	045
---	------	---	---	-----	---	---	---	---	-----

① シャックサイズ Shank Size

② 呼称 Holder's Name

③ MT No. MT No.

④ GL長さ L G.L. Length