

正面フライスアーバB型

FACE MILL ARBOR (Type B)

BT/BBT[®]-FMB[®]-L

**BT /
BBT
series**
BT/BBTシリーズ

▶ センタースルー対応 (オプション) Thru -the-tool Coolant Available (Option)



FIG.1

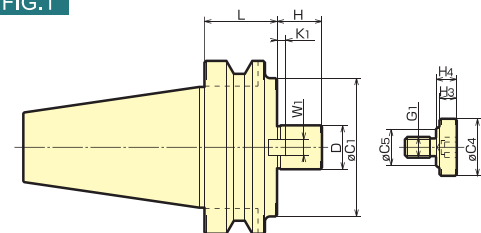


FIG.2

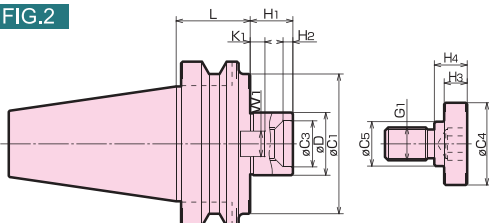


FIG.3


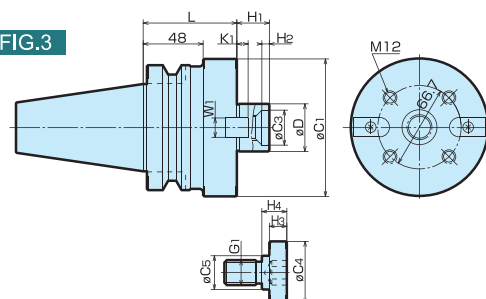


FIG.4

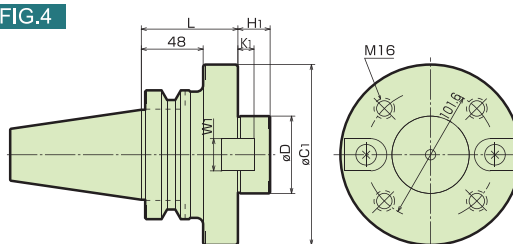

MODEL	CODE		FIG.	øD (h6)	L	øC1	øC3	H1	H2	KEY		G1	CLAMP BOLT				N/W (kg)
	BT	BBT								W1	K1		øC4	øC5	H3	H4	
BT40 BBT40	-FMB25.4 - 060	(△)	(△)	1	25.4	60	80	26	—	9.5	5	M12	33	23	10	12	1.3
	- 105	(△)	(△)			105											3.3
	-FMB38.1 - 060	(△)	(△)	2	38.1	60	85	26	6	15.9	9	M20	50	27	14	20	2.6
	-FMB27 - 060	(△)	(△)			60											2.3
	- 105	(△)	(△)	1	27	105	80	26	—	12	6	M12	33	23	10	12	3.3
BT50 BBT50	-FMB40 - 060	(△)	(△)	2	40	60	85	26	6	16	8.5	M20	50	27	14	20	2.6
	-FMB25.4 - 045	(△)	(△)	1	25.4	45	80	26	—	9.5	5	M12	33	23	10	12	4.1
	- 090	(△)	(△)			90											6.1
	- 150	(△)	(△)			150											8.3
	-FMB38.1 - 045	(△)	(△)	2	38.1	45	85	26	6	15.9	9	M20	50	27	14	20	4.4
	- 075	(△)	(△)			75											5.7
	- 105	(△)	(△)			105											7.0
	-FMB38.1F - 075	(△)	(△)	3	38.1	75	110	28	6	15.9	9	M20	50	27	14	20	6.6
	-FMB27 - 045	(△)	(△)	1	27	45	80	26	—	12	6	M12	33	23	10	12	4.1
	- 090	(△)	(△)			90											5.9
	- 150	(△)	(△)			150											8.3
	-FMB40 - 045	(△)	(△)	2	40	45	85	26	6	16	8.5	M20	50	27	14	20	4.4
	- 075	(△)	(△)			75											5.7
	- 105	(△)	(△)			105											7.1
	-FMB40F - 075	(△)	(△)	3	40	75	110	28	6	16	8.5	M20	50	27	14	20	6.7
	-FMB60 - 075	(△)	(△)	4	60	75	140	—	25	—	25.4	12.5	—	—	—	—	8.5

注：1. BBTは受注生産品です。
2. (△) 表記製品は特殊対応品です。

NOTE: 1. BBT shank type is made-to-order.
2. CODE(△)The listed products are made-to-order products.

ご注文例 ORDERING EXAMPLE

① BT40 ② - FMB ③ 25.4 ④ - 060

① シャンクサイズ Shank Size
② 呼称 Name
③ ボス径 øD øD
④ GL長さ L G.L. Length

アクセサリ ACCESSORIES

▶ P.173 正面フライスアーバ用クランプボルト CLAMP BOLT FOR FACE MILL ARBOR